

THIS DOCUMENT AND THE INFORMATION IT CONTAINS IS THE PROPERTY OF EMTEQ INC. AND MAY NOT BE USED IN ANY WAY WITHOUT THE EXPRESS WRITTEN CONSENT OF EMTEQ INC.

REV	REVISION	DATE	ER #	INTL
A00	RELEASED TO PRODUCTION	08/26/2011	0249-11	VML
A01	CHANGE ASSY INSTRUCTIONS TO ES-105-74	12/14/2011	0680-11	VML

DIMENSIONAL INFORMATION

PART NO.	"A"	"B"	"C"	ASS'Y INSTRUCTIONS
MBMS190-075-1	0.924 (23.5)	0.44 (11.2)	.214 (5.44)	ES-105-74

NOTES:

- 1) REF: SUPPLIER #3189 ONLY FOR PURCHASING.
- 2) CONNECTORS TO BE BAGGED IN EMTEQ BAGS WITH THE EMTEQ ASSEMBLY INSTRUCTIONS. THE BAG WILL THEN BE LABELED WITH PART NUMBER AND LOT#.

SPECIFICATIONS:

- 1) ELECTRICAL
 IMPEDANCE: 75 OHMS
 FREQUENCY RANGE: 0 TO 2 GHZ
 VOLTAGE RATING: 300 V RMS
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 V RMS
 INSULATION RESISTANCE: 1,000 MEGOHMS MIN


- 2) MECHANICAL
 TERMINATION STYLE: INNER CONTACT - SOLDER
 OUTER CONTACT - CRIMP


TEMPERATURE RANGE: -40° C TO +85° C

FINISHES:

BODY FINISH: PROPRIETARY NICKEL
 CONTACT FINISH: GOLD PLATED PER MIL-G-45204

DESIGNED IN ACCORDANCE WITH MIL-C-39012 STANDARDS.

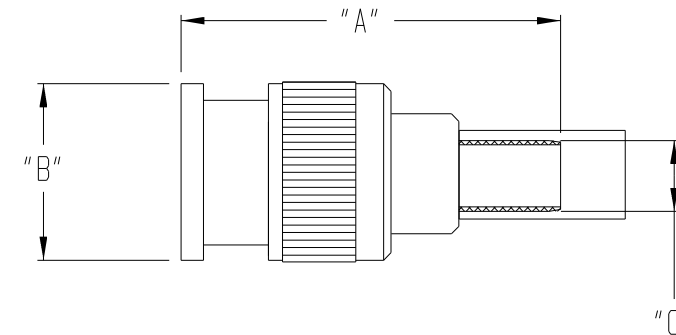

MATERIAL	SCALE -	SIZE B	DATE 08/26/2011	 5349 S. EMMER DRIVE NEW BERLIN, WI 53151 (888) 679-6170	
	TOLERANCES UNLESS NOTED .XX = ± .03 .XXX = ± .010 ANGLES ± 1°		DRAWN V. LEX DESIGNED		75 OHM MINI BNC CABLE PLUG, CRIMP OR SOLDER
FINISH	CAD GENERATED AND MAINTAINED DRAWING -- DO NOT SCALE		CHECKED <i>[Signature]</i> 12/15/2011	APPROVED 12/15/2011 B. KOJIS	
	NOTICE -- ALL CHANGES TO THIS DOCUMENT ARE CONTROLLED BY EMTEQ INC / UNLESS OTHERWISE STATED, ALL REPRODUCTIONS OF THIS DOCUMENT ARE NOT CONTROLLED BY EMTEQ INC				SHT 1 OF 1